



# Petrol and Oil Interceptor

VP10

- > below-ground installation.
- > usually associated with automotive workshops such as a garage, carwash, & etc. and also referred to as a Triple Interceptor.
- > this tank design contains and slows the flow of waste to allow the grease, oil, and traces of fuel and solvents to float and separate from the cleaner water which exits the tank from a low level.

Capacity litres	Dimensions mm			
	A	B	C	D
600	1400	750	570	970
1140	1900	600	1000	1400
2000	2900	900	770	1170

- > Cast Iron Cover (supplied separately)

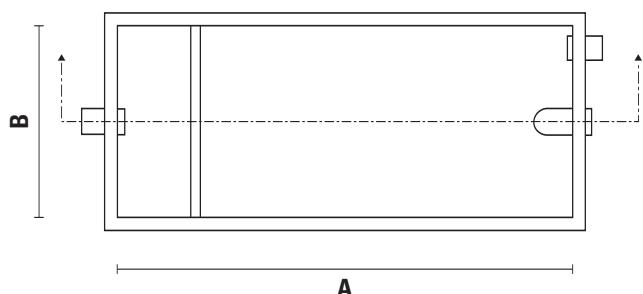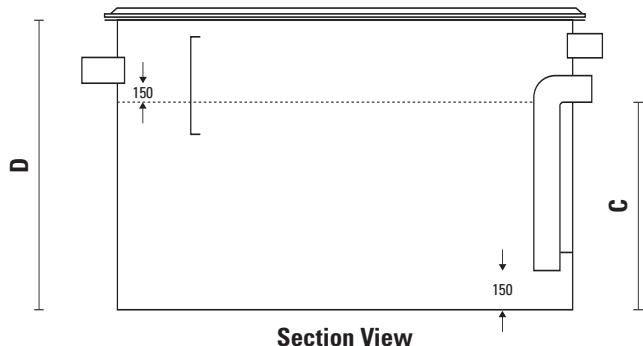

## Petrol and Oil Interceptor model VP10

For below-ground installations

- > Manufactured from Polypropylene materials, this tank is suitable for below-ground installations
- > The tank must be surrounded with 100mm thick concrete walls and base
- > Inlet, Outlet and Vent are 100mm nb.– plain pipe
- > Access covers (supplied separately) capable of being removed by one man should be fitted on top.
- > Tank dimensions and pipework positions are nominal and in all cases conform to Trade Waste recommendations
- > When space limitations dictate, equivalent capacity tanks can be manufactured to order

## Other products available

- > Grease Interceptors for above and below-ground installations
- > Mixing Tanks
- > Settling Tanks (Plaster Trap)
- > Acid Neutralising Tanks
- > Testing Sump
- > Solvent and Oil Interceptor
- > Water Storage Tanks
- > Custom Fabrication to order
- > Laboratory Sinks
- > Pot Sinks