


Solvent and Oil Interceptor

VP8

- > above-ground installation.
- > typically installed in a Screen Print workshop.
- > this tank design contains and slows the flow of waste to allow any solvents and/or oil to float and separate from the cleaner water which flows out to sewer. Collected waste should be drained from the tank periodically and disposed as directed by local authorities.

Capacity litres	Dimensions mm			
	A	B	C	D
100	750	450	300	500
250	900	530	530	730
600	1500	750	540	840
1100	1500	900	820	1120
2000	2000	1000	1000	1300

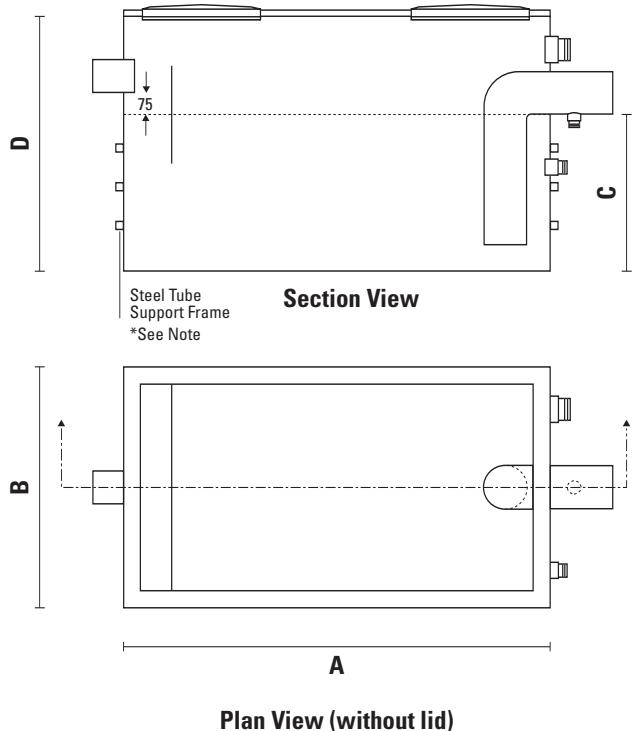

Solvent and Oil Interceptor model VP8

- > Manufactured from 6mm Polypropylene (PP) or 1.6mm galvanised sheet iron or stainless steel, this tank is suitable for use with dilute solutions of solvents, petrol and oils
- > The tank is supplied with:
 - a removable airtight cover
 - 25mm sampling valve socket
 - 25mm drain valve socket
 - 32mm vent socket
- > Tank dimensions and pipework positions are nominal and in all cases conform to Trade Waste recommendations
- > When space limitations dictate, equivalent capacity tanks can be manufactured to order
- > *Note: Tanks larger than 250 litres capacity have external bracing fitted. Allow 50mm all round

Other products available

- > Grease Interceptors for above-ground and pit liners for below-ground installations
- > Mixing Tanks
- > Settling Tanks (Plaster Trap)
- > Acid Neutralising Tanks
- > Testing Sump
- > Petrol and Oil Interceptor
- > Water Storage Tanks
- > Custom Fabrication to order
- > Laboratory Sinks